


Wedgear® NFS Flexible Coupling Manual Reset

DATASHEET Version April 2020 - mm-Nm

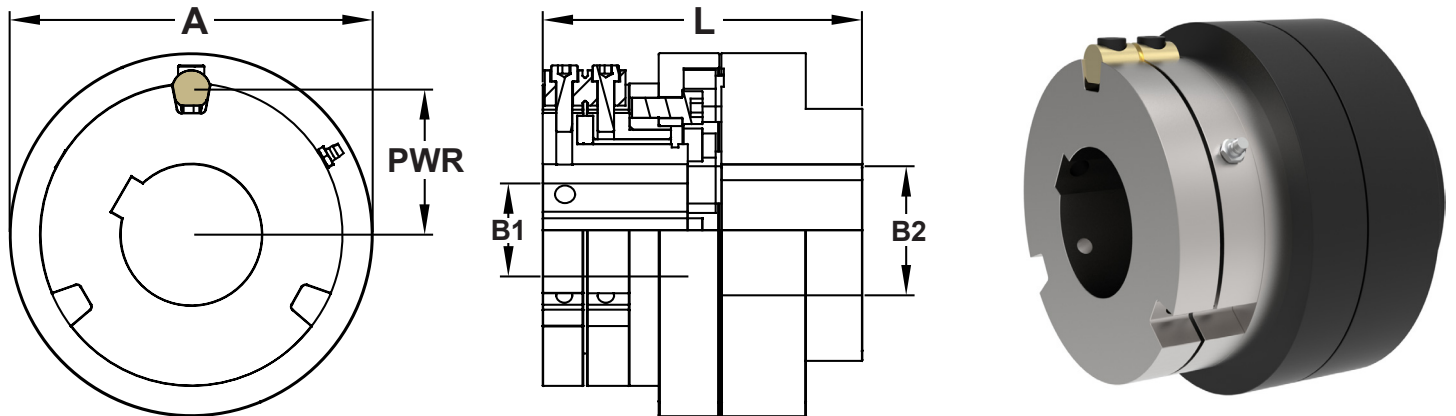

- Type NFS Wedgear Couplings are supplied bored and keywayed to customer requirements.
- Standard Units for release torques up to 21557 Nm.
- Torque is adjustable by Wedgepin ratings.
- Standard finish - Natural.
- **Higher Release/Shear Torques may be available.**

Model	Nom Drive Nm	Max Re-release Nm	Wedgepins	PWR	Dia (A)	Bores		Length (L)	Min Shaft Gap
						Max (B1)	Max (B2)		
NFS 350-110	400	2785	3 x W37	47	135	48	35	113	4
NFS 500-125	600	3230	3 x W37	54.5	160	55	50	121	10
NFS 700-180	2200	8024	3 x W50	72	198	75	70	162	10
NFS 700-225	5000	8024	3 x W50	72	275	90	70	195	10
NFS 950-250	7000	21557	3 x W75	105.5	350	100	100	250	15

*All dimensions in mm unless otherwise specified

Maximum Release/Shear Torques shown are for RED coded Wedgepins fitted.
Dimensions and specifications may change for improvement without notice.



Can't find the torque limiter you're looking for? Howdon offers a bespoke engineering design service.

Tel: +44 (0)1453 750814
Fax: +44 (0)1453 765320
www.howdon.co.uk
sales@howdon.co.uk

